

REBEL

RA500W



500W




AB
Class

- 2 channel amplifier, Class AB
- Great price vs performance ratio
- Heavy and efficient heatsink for "Best in class" reliability & performance
- Variable 12dB / Octave crossovers
- 4 Way Protection Circuit

Product Specifications

Total Power:	500W MAX
Power (2 ohm):	2x125W RMS *
Power (4 ohm):	2x75W RMS *
Bridged Power (4 ohm):	1x250W RMS *
S/N ratio:	90dB
Freq. response:	15Hz - 20kHz
Low Pass filter:	50Hz - 250Hz
High Pass filter:	32Hz - 2kHz
Bass boost:	0/6/12 dB (45Hz)
Input adjustment	0.2V - 6V
Voltage:	10V - 16V
Protect:	Short Circuit protection
	Overload protection
	DC protection
	Thermal protection

* RMS Power at 14.4 V, THD 1%

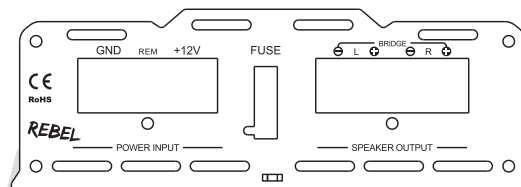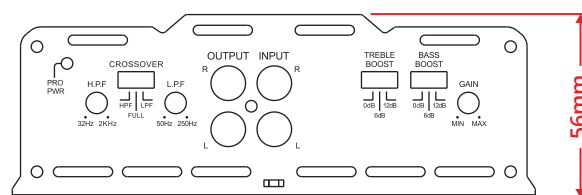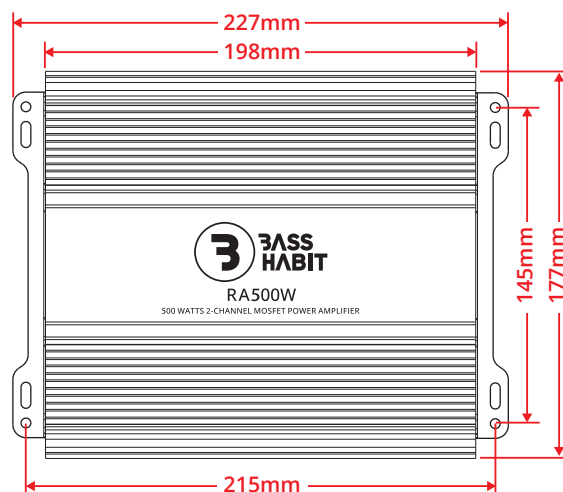

Recommended 12V+ cable	Recommended REM cable	Recommended GND cable	Recommended fuse rating
8 AWG / 10mm ²	18-10 AWG / 0.75-6mm ²	8 AWG / 10mm ²	30A