




PP1000.1 G2

- Mono channel amplifier
- Class D
- Heavy duty heatsink design
- **3** Great price vs performance ratio
- E Linkable with another PP1000.1 G2
- Subsonic filter & Low pass filter
- 3 Way Protection Circuits

Product Specifications		
Power output (1 ohm):	1x1000W RMS	
Power output (2 ohm):	1x650W RMS	
Power output (4 ohm):	1x380W RMS	
Total Power:	2000W MAX	
S/N ratio:	>85dB	
Freq. response:	15Hz-180Hz	
Subsonic filter:	15Hz-50Hz	
LP filter:	40Hz-180Hz	
Bass boost:	0-12dB (30-80Hz)	
Voltage:	10V-16V DC	



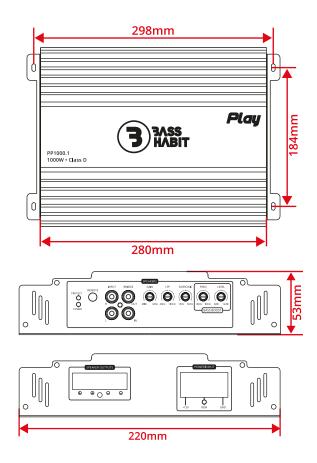

Recommended 12V+ cable	Recommended REM cable	Recommended GND cable	Recommended fuse rating
4 AWG / 20mm²	18-10 AWG / 0.75-6mm²	4 AWG / 20mm²	80 A