




# Play

## PP55.4 G2



600W Max  
AB Class

- ③ 4 channel amplifier
- ③ Class AB Full Range
- ③ Heavy duty heatsink design
- ③ Great price vs performance ratio
- ③ Versatile 12db / octave High pass filter & Low pass filter
- ③ 3 Way Protection Circuits

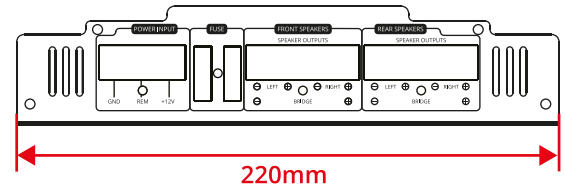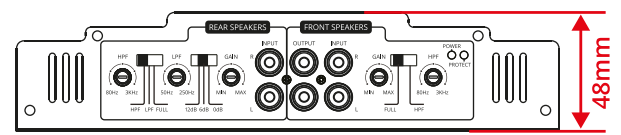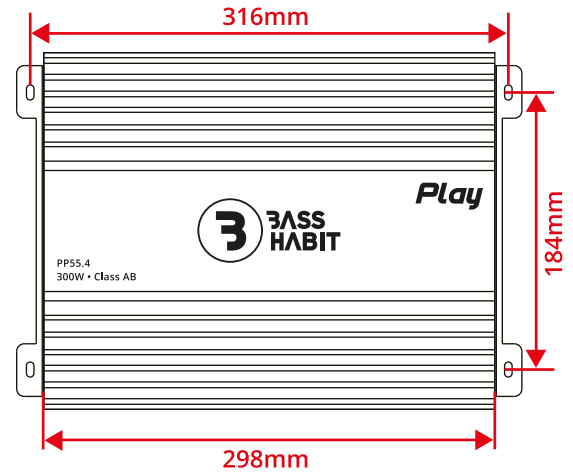

Product Specifications	
Power output (2 ohm):	4x75W RMS
Power output (4 ohm):	4x55W RMS
Bridge Power (4 ohm):	2x140W RMS
Total Power:	600W MAX
S/N ratio:	>90dB
Freq. response:	20Hz-20KHz
HP filter:	80Hz - 3KHz
LP filter:	50Hz - 250Hz
Bass boost:	0 / 6 / 12 dB (45Hz)
Voltage:	10V-16V DC

Recommended 12V+ cable	Recommended REM cable	Recommended GND cable	Recommended fuse rating
8 AWG / 10mm <sup>2</sup>	18-10 AWG / 0.75-6mm <sup>2</sup>	8 AWG / 10mm <sup>2</sup>	50 A