




# Play

## PP65.4 G2

- ③ 4 channel amplifier
- ③ Class AB Full Range
- ③ Heavy duty heatsink design
- ③ Great price vs performance ratio
- ③ Versatile 12db / octave High pass filter & Low pass filter
- ③ 3 Way Protection Circuits



880W Max  
AB Class

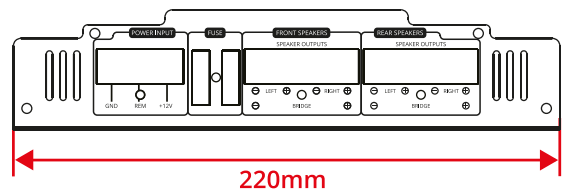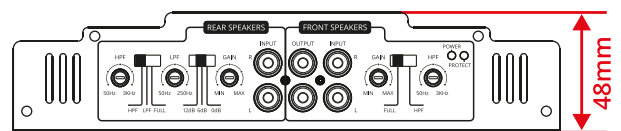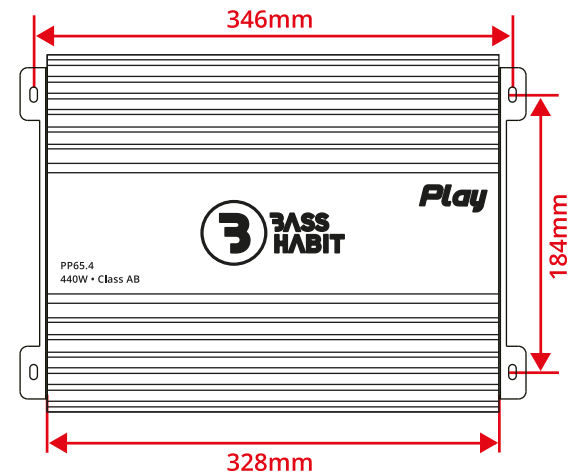

| Product Specifications |                      |
|------------------------|----------------------|
| Power output (2 ohm):  | 4x110W RMS           |
| Power output (4 ohm):  | 4x65W RMS            |
| Bridge Power (4 ohm):  | 2x180W RMS           |
| Total Power:           | 880W MAX             |
| S/N ratio:             | >90dB                |
| Freq. response:        | 20Hz-20KHz           |
| HP filter:             | 50Hz - 3KHz          |
| LP filter:             | 50Hz - 250Hz         |
| Bass boost:            | 0 / 6 / 12 dB (45Hz) |
| Voltage:               | 10V-16V DC           |

| Recommended 12V+ cable    | Recommended REM cable             | Recommended GND cable     | Recommended fuse rating |
|---------------------------|-----------------------------------|---------------------------|-------------------------|
| 8 AWG / 10mm <sup>2</sup> | 18-10 AWG / 0.75-6mm <sup>2</sup> | 8 AWG / 10mm <sup>2</sup> | 50 A                    |