

Play

PP70.2 G2






400W Max

AB Class

- ③ 2 channel amplifier
- ③ Class AB Full Range
- ③ Heavy duty heatsink design
- ③ Great price vs performance ratio
- ③ Versatile 12db / octave High pass filter & Low pass filter
- ③ 3 Way Protection Circuits

Product Specifications	
Power output (2 ohm):	2x100W RMS
Power output (4 ohm):	2x70W RMS
Bridge Power (4 ohm):	1x180W RMS
Total Power:	400W MAX
S/N ratio:	>90dB
Freq. response:	20Hz-20KHz
HP filter:	50Hz - 3KHz
LP filter:	50Hz - 500Hz
Bass boost:	0 / 6 / 12 dB (45Hz)
Voltage:	10V-16V DC

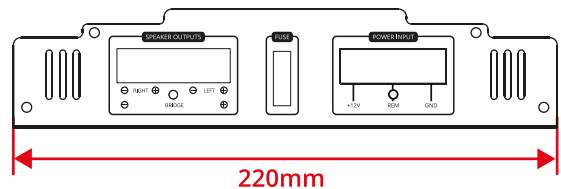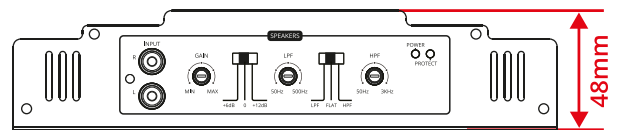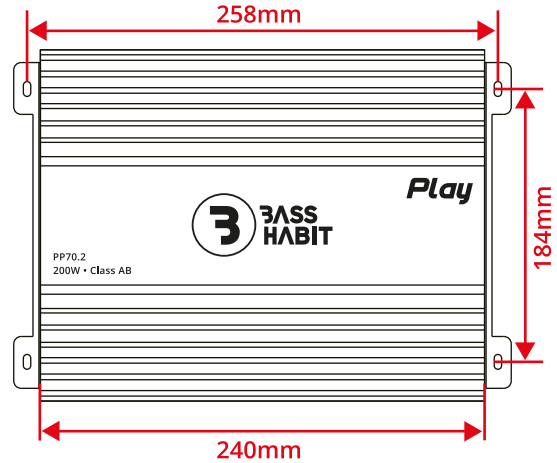

Recommended 12V+ cable	Recommended REM cable	Recommended GND cable	Recommended fuse rating
8 AWG / 10mm ²	18-10 AWG / 0.75-6mm ²	8 AWG / 10mm ²	40 A