





# ELITE

## SE225.4DF



- ③ 4 channel SPL amplifier
- ③ Class D Full Range / Full Bridge Technology
- ③ High power amplifier & small form factor
- ③ Great price vs performance ratio
- ③ Versatile 12db / octave High pass filter & Low pass filter
- ③ 4 Way Protection Circuit

Product Specifications	
Power (1 ohm):	4x225W RMS
Power (2 ohm):	4x130W RMS
Power (4 ohm):	4x75W RMS
Bridged (2 ohm):	2x450W RMS
Bridged (4 ohm):	2x260W RMS
Power MAX:	1800W MAX
S/N ratio:	100dB
Freq. response:	15Hz-20KHz
HP filter:	15Hz - 6KHz
LP filter:	50Hz - 6KHz
Bass boost:	0-12 dB (50Hz)
Voltage:	10.5V-15.5V DC

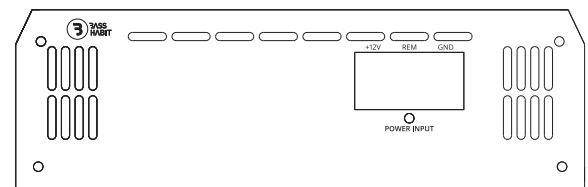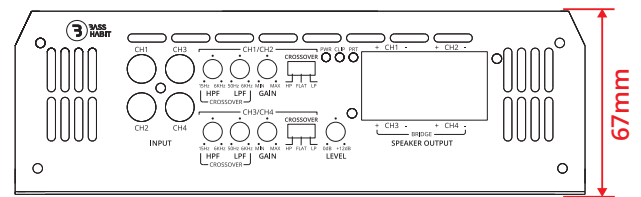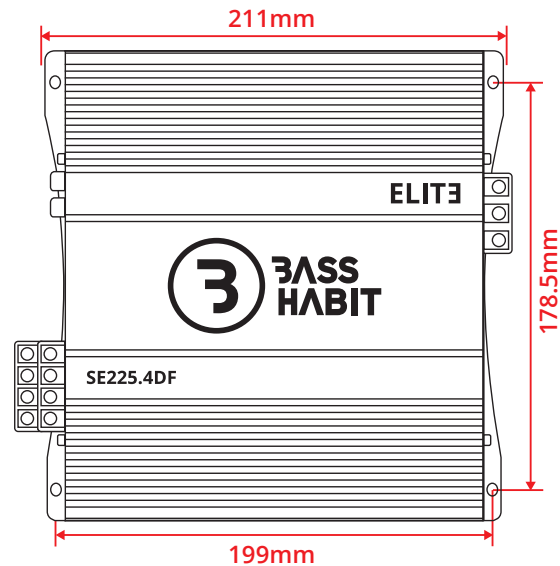

Recommended 12V+ cable	Recommended REM cable	Recommended GND cable	Recommended fuse rating
4 AWG / 20mm <sup>2</sup>	17-10 AWG / 1-6mm <sup>2</sup>	4 AWG / 20mm <sup>2</sup>	80 A