


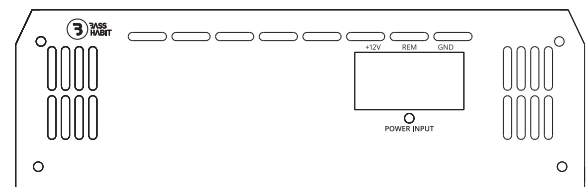


ELITE

SE550.4DF

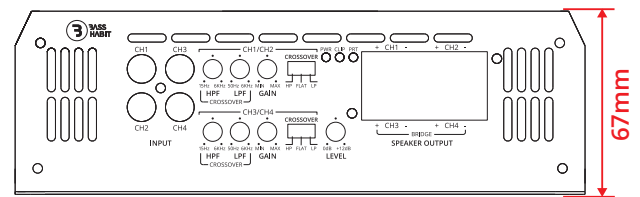

- ③ 4 channel SPL amplifier
- ③ Class D Full Range / Full Bridge Technology
- ③ High power amplifier & small form factor
- ③ Great price vs performance ratio
- ③ Versatile 12db / octave High pass filter & Low pass filter
- ③ 4 Way Protection Circuit

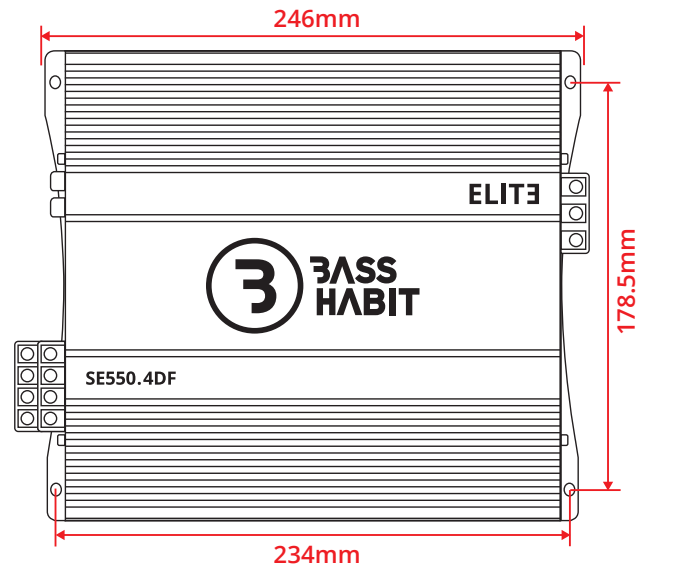

Product Specifications

Power (1 ohm):	4x550W RMS
Power (2 ohm):	4x310W RMS
Power (4 ohm):	4x200W RMS
Bridged (2 ohm):	2x1100W RMS
Bridged (4 ohm):	2x620W RMS
Power MAX:	4400W MAX
S/N ratio:	100dB
Freq. response:	15Hz-20KHz
HP filter:	15Hz - 6KHz
LP filter:	50Hz - 6KHz
Bass boost:	0-12 dB (50Hz)
Voltage:	10.5V-15.5V DC

Recommended 12V+ cable	Recommended REM cable	Recommended GND cable	Recommended fuse rating
2 AWG / 35mm ²	17-10 AWG / 1-6mm ²	2 AWG / 35mm ²	150 A